

SQ7803LR-PDX

Machine for lap seaming

3 needle, double chain stitch, feed-off-the-arm machine with a differential feeding system and our original belt puller.

This model is suitable for lap seam, yoke seam and inseam on heavy duty such as jeans and working pants.

★ The sensor detects the thickness of the material and controls the speed, presser foot, puller pressure and threads tension.

PROTOTYPE



Features




KANSAI SPECIAL Original belt puller

Newly developed original puller system realizes more powerful fabric feeding. The cross point of crotch seam and yoke seam can be sewn stably. The feed amount can also be adjusted easily.



Manual chain cutter

At the end of sewing, the chain can be cut off without using scissors, making it operator-friendly.

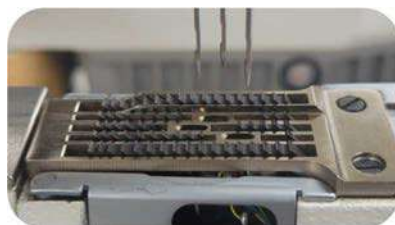

Differential feed mechanism

Left & right differential feed mechanism prevents from puckering.

Before



After



Specifications	SQ7803LR-PDX
Max. Speed	5000 rpm
Needle Type	Organ TVx5 #22
Stitch Length	6~12 stitch/inch
Presser Foot Lift	10 mm
Needle Bar Stroke	35 mm
Diff. Feed Ratio	Left and right movement (ratio 0.7~1.3)
Gauge Size	1/4
Application	Lap seaming
Material	Heavy

